

















### Features

- · Constant Voltage + Constant Current mode output
- Circular shape PCB type design
- · Built-in active PFC function
- Function options: output adjustable via potentiometer; 3 in 1 dimming; DALI
- Typical lifetime>50000 hours
- 5 years warranty

# Applications

- · LED bay lighting
- LED down lighting
- · LED spot lighting
- LED mining lighting
- · LED stage lighting


# GTIN CODE

MW Search: https://www.meanwell.com/serviceGTIN.aspx

# Description

HBG-160P series is a 160W AC/DC PCB type LED driver featuring the circular shape design. It operates from  $90\sim305$  VAC and offers the dual mode constant voltage and constant current output models with different rated voltage ranging between 36V and 60V. Thanks to the high efficiency up to 93.5%, with the fanless design, the entire series is able to operate for  $-40^{\circ}$ C  $\sim +45^{\circ}$ C under free air convection. HBG-160P is equipped with various function options, such as dimming methodology, so as to provide the optimal design flexibility for LED lighting system.

# Model Encoding

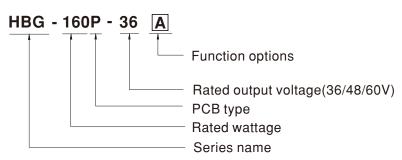

Туре	Function	Note
Α	lo adjustable through built-in potentiometer.	In Stock
В	3 in 1 dimming function (1~10Vdc, 10V PWM signal and resistance)	In Stock
DA	DALI control technology.	In Stock



# 160W Constant Voltage + Constant Current LED Driver HBG-160P series


## **SPECIFICATION**

MODEL		HBG-160P-36	HBG-160P-48	HBG-160P-60		
	DC VOLTAGE	36V	48V	60V		
ОИТРИТ	CONSTANT CURRENT REGION Note.2	21.6 ~ 36V	28.8 ~ 48V	36 ~ 60V		
	RATED CURRENT	4.4A	3.3A	2.6A		
	RATED POWER Note.5	158.4W	158.4W	156W		
	RIPPLE & NOISE (max.) Note.3		300mVp-p	300mVp-p		
	THE LE GITTER (MAXI) NOTES	Adjustable for A-Type only (via built-in potentiometer)				
	CURRENT ADJ. RANGE	2.6 ~ 4.4A	1.98 ~ 3.3A	1.6 ~ 2.6A		
	VOLTAGE TOLEDANGE		1.96 ~ 3.5A	1.0 · 2.0A		
	VOLTAGE TOLERANCE Note.4					
	LINE REGULATION	±0.5%				
	LOAD REGULATION	±1.0%				
	SETUP, RISE TIME Note.6	2500ms, 200ms / 115VAC 500ms, 200ms / 230VAC				
	HOLD UP TIME (Typ.)	12ms/115VAC,230VAC				
	VOLTAGE BANGE N	90 ~ 305VAC 127~417VDC				
	VOLTAGE RANGE Note.5	(Please refer to "STATIC CHARACTERISTIC" section)				
	FREQUENCY RANGE	47 ~ 63Hz				
		PF≥0.98/115VAC, PF≥0.95/230VAC, PF≥0.92/277VAC@full load (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)  THD<20%(@load≥60%/115VC,230VAC; @load≥75%/277VAC) (Please refer to "TOTAL HARMONIC DISTORTION(THD)" section)				
	POWER FACTOR					
	TOTAL HARMONIC DISTORTION					
NBUT		<u>'</u>		·		
NPUT	EFFICIENCY (Typ.) Note.7	92%	93%	93.5%		
	AC CURRENT	1.7A / 115VAC 0.78A / 230V				
	INRUSH CURRENT(Typ.)	COLD START 65A(twidth=550µs measured at 50% Ipeak) at 230VAC; Per NEMA 410				
	MAX. No. of PSUs on 16A	4 units (circuit breaker of type B) / 7 units (circuit breaker of type C) at 230VAC				
	CIRCUIT BREAKER	4 units (circuit breaker of type b) / / units (circuit breaker of type C) at 250VAC				
	LEAKAGE CURRENT	<0.75mA/277VAC				
	NO LOAD / STANDBY	Standby power consumption <0.5W for B/DA-Type A-Type please refer to Note. 9				
	POWER CONSUMPTION					
		95 ~ 108%				
PROTECTION	OVER CURRENT	Constant current limiting, recovers automatically after fault condition is removed				
		-				
	OVER VOLTAGE	41 ~ 47V	54 ~ 62V	65 ~ 75V		
		Protection type : Shut down o/p vo				
	OVER TEMPERATURE Note.13	3.,				
	WORKING TEMP.	Ta=-40 ~ +45°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)				
	WORKING HUMIDITY	20 ~ 95% RH non-condensing				
ENVIRONMENT	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH				
	TEMP. COEFFICIENT	±0.03%/°C (0~45°C)				
	VIBRATION	- ( - /	riod for 72min each along X Y	7 axes		
	VIDIOTION	10 ~ 500Hz, 2G 12min./1cycle, period for 72min. each along X, Y, Z axes  UL8750,CSA C22.2 No.250.13-12; ENEC BS EN/EN61347-1,BS EN/EN61347-2-13,BS EN/EN62384, GB19510.1				
	SAFETY STANDARDS	GB19510.14, EAC TP TC 004 approved				
	DALLOTANDADDO	•				
	DALI STANDARDS	Compliance to IEC62386-101, 102, 207 for DA-Type only				
SAFETY &	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC I/P-FG:2K				
EMC	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M (				
	EMC EMISSION	Compliance to BS EN/EN55015, BS EN/EN61000-3-2 Class C (@load ≧60%) ; BS EN/EN61000-3-3, GB17743,				
	LING LINIOGIGIT	GB17625.1,EAC TP TC 020				
	EMC IMMUNITY	Compliance to BS EN/EN61000-4-	2,3,4,5,6,8,11, BS EN/EN61547,li	ght industry level(surge immunity:Line-Earth:4K\		
	EMC IMMUNITY	Line-Line:2KV),EAC TP TC 020				
	MTBF	2612.1K hrs min. Telcordia SR	-332 (Bellcore) ;195.6K hrs min.	MIL-HDBK-217F ( $25^{\circ}$ C)		
OTHERS	DIMENSION	Refer to mechanical specification				
	PACKING	0.4Kg; 36pcs/15.4Kg/1.35CUFT				
		0. 1	Cinnut_rated current and 25°C of a	nhient temperature		
IOTE	<ol> <li>All parameters NOT specially mentioned are measured at 230VAC input, rated current and 25℃ of ambient temperature.</li> <li>Please refer to "DRIVING METHODS OF LED MODULE".</li> </ol>					
	3. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.					
	4. Tolerance : includes set up tolerance, line regulation and load regulation.  5. Do rating may be pended under law input voltages. Please rater to "STATIC CHARACTERISTIC" acctions for details.					
	<ol> <li>De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.</li> <li>Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time.</li> </ol>					
	6. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time.  7. The DA type power supply is less efficient than the typical efficiency in specification by 1%.					
	8. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the					
	complete installation, the fin	complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.				
		the latest ErP regulation for lighting fixtures, this LED driver can only be used behind a switch without permanently				
	connected to the mains.					
	<ul> <li>10. This series meets the typical life expectancy of &gt;50,000 hours of operation when Ta is about 45°C or less.</li> <li>11. Please refer to the warranty statement on MEAN WELL's website at http://www.meanwell.com</li> </ul>					
		re derating of $3.5^{\circ}$ C/1000m with fanless models and of $5^{\circ}$ C/1000m with fan models for operating altitude higher than 2000m(6500ff				
	13. All functional testing must	be filled with potting,including OTP function .				
	× Product Liability Disclaimer: For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx					

XX Product Liability Disclaimer: For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx


## ■ BLOCK DIAGRAM

fosc: 100KHz

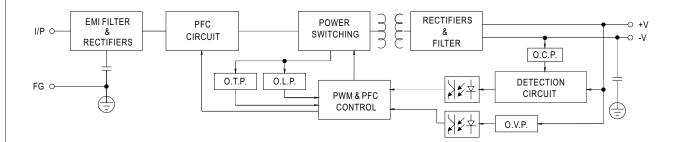

## ■ DRIVING METHODS OF LED MODULE

X This series is able to work in either Constant Current mode (a direct drive way) or Constant Voltage mode (usually through additional DC/DC driver) to drive the LEDs.




Typical output current normalized by rated current (%)

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.


Should there be any compatibility issues, please contact MEAN WELL.

## **■ DIMMING OPERATION**

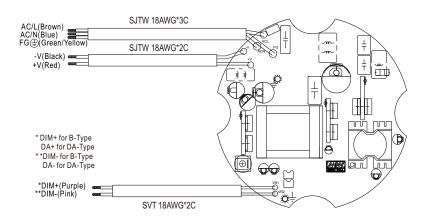


#### ※ 3 in 1 dimming function (for B-Type)


- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-: 1 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: 100µA (typ.)
- O Applying additive 1 ~ 10VDC




"DO NOT connect "DIM- to -V"



O Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):




"DO NOT connect "DIM- to -V"






# 160W Constant Voltage + Constant Current LED Driver HBG-160P series


#### Applying additive resistance:



"DO NOT connect "DIM- to -V"



Note: In the case of turning the lighting fixture down to 0% brightness, please refer to the configuration as follow, or please contact MEAN WELL for other options.

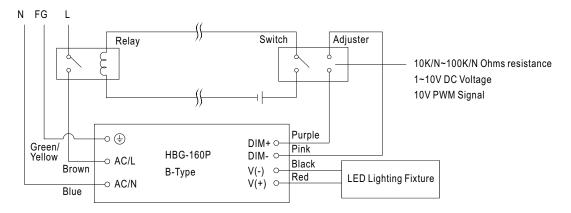


Using a switch and relay can turn ON/OFF the lighting fixture.

# $\frak{M}$ DALI Interface (primary side; for DA-Type)


- $\cdot$  Apply DALI signal between DA+ and DA-.
- DALI protocol comprises 16 groups and 64 addresses.
- First step is fixed at 8% of output.

# ■ OUTPUT LOAD vs TEMPERATURE




#### AMBIENT TEMPERATURE, Ta (°C)

#### **■ STATIC CHARACTERISTIC**




※ De-rating is needed under low input voltage.

## ■ POWER FACTOR (PF) CHARACTERISTIC




■ TOTAL HARMONIC DISTORTION (THD)



#### **■** EFFICIENCY vs LOAD

HBG-160P series possess superior working efficiency that up to 93.5% can be reached in field applications.







# 160W Constant Voltage + Constant Current LED Driver HBG-160P series

# ■ MECHANICAL SPECIFICATION

#### ※ A type

Unit:mm

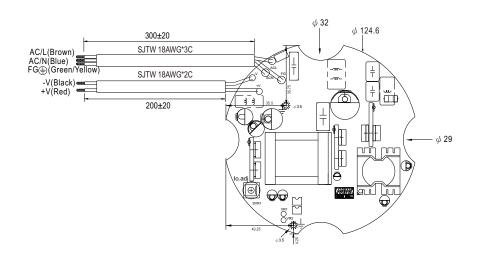



#### 

